

**DS-3E1326P-EI**  
**24 Port Fast Ethernet Smart POE Switch**


- 24 × 100 Mbps PoE RJ45 ports, 2 × gigabit combos.
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, network health monitor.
- 6 KV surge protection for PoE ports.
- AF/AT camera can reach up to 300 m in extend mode.

## ▪ Specification


| Model                     | DS-3E1326P-EI          |   |
|---------------------------|------------------------|---|
| <b>Network Parameters</b> | Port Type              | RJ45 port, full duplex, MDIMDI-X adaptive   |
|                           | Ports                  | 24 × 10/100 Mbps PoE port, 2 × 1 Gigabit combo  |
|                           | Standard               | IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, IEEE 802.3z   |
|                           | High Priority Ports    | Ports 1 to 8  |
|                           | Forwarding Mode        | Store-and-forward switching   |
|                           | Working Mode           | Standard mode (default), Extend mode  |
|                           | MAC Address Table      | 16 K  |
|                           | Switching Capacity     | 8.8 Gbps  |
|                           | Packet Forwarding Rate | 6.5472 Mpps   |
|                           | Internal Cache         | 4 Mbits   |
| <b>PoE Power Supply</b>   | PoE Standard           | IEEE 802.3af, IEEE 802.3at  |
|                           | PoE Power Pin          | End-span: 1/2(-), 3/6(+)<br>Mid-span: 4/5(+), 7/8(-)<br>8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)             |
|                           | PoE Port               | PoE: Ports 1 to 24  |
|                           | Max. Port Power        | 30 W  |
|                           | PoE Power Budget       | 370 W   |
| <b>Software Function</b>  | Device Maintenance     | Support remote upgrade, default parameter restoration, logs viewing, and basic network parameter configuration. |
|                           | Port Configuration     | Support rate, flow control, and switch configuration  |
|                           | PoE Configuration      | Support port rate configuration, flow control, and ports enabling.  |
|                           | Link Aggregation       | Support G1, G2 port static link aggregation   |
| <b>General</b>            | Shell                  | Metal material  |
|                           | Net Weight             | 2.83 kg (6.24 lb)   |
|                           | Gross Weight           | 3.800 kg (8.38 lb)  |
|                           | Dimensions (W × H × D) | 440.00 mm × 44.00 mm × 221.00 mm (17.32" × 1.73" × 8.70")   |
|                           | Operating Temperature  | -10 °C to 55 °C (14 °F to 131 °F)   |
|                           | Storage                | -40 °C to 85 °C (-40 °F to 185 °F)  |

|                 |                        |   |
|-----------------|------------------------|---|
|                 | Temperature            |   |
|                 | Operating Humidity     | 5% to 95% (no condensation)   |
|                 | Relative Humidity      | 5% to 95% (no condensation)   |
|                 | Power Supply           | 100-240 VAC, 50/60 Hz, Max. 6.5 A   |
|                 | Max. Power Consumption | 400 W   |
| <b>Approval</b> | EMC                    | FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016) |
|                 | Safety                 | UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)  |
|                 | Chemistry              | CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No.1907/2006)   |

▪ **Typical Application**

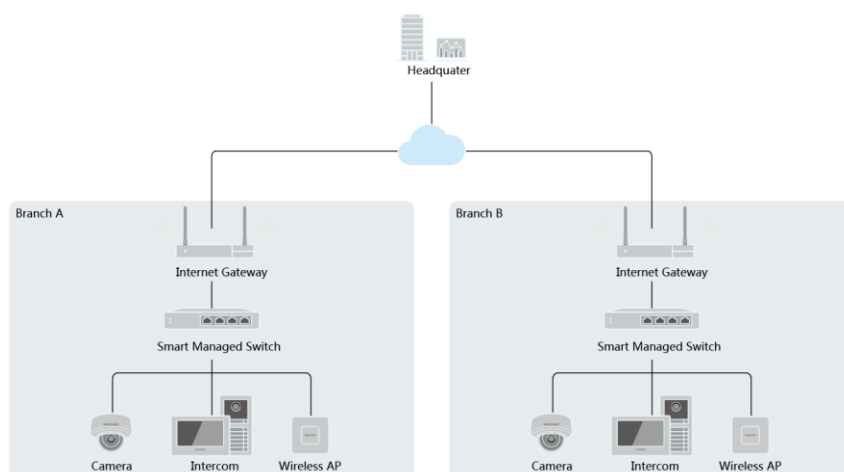

▪ **Physical Interface**

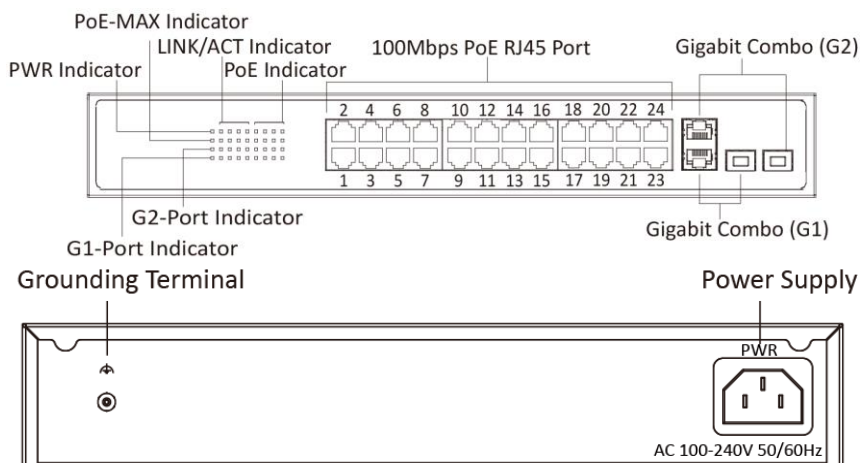

- 
-


▪ **Available Model**

DS-3E1326P-EI

DS-3E1326P-EIV2

DS-3E1326P-EIV2/USA

▪ **Dimension**

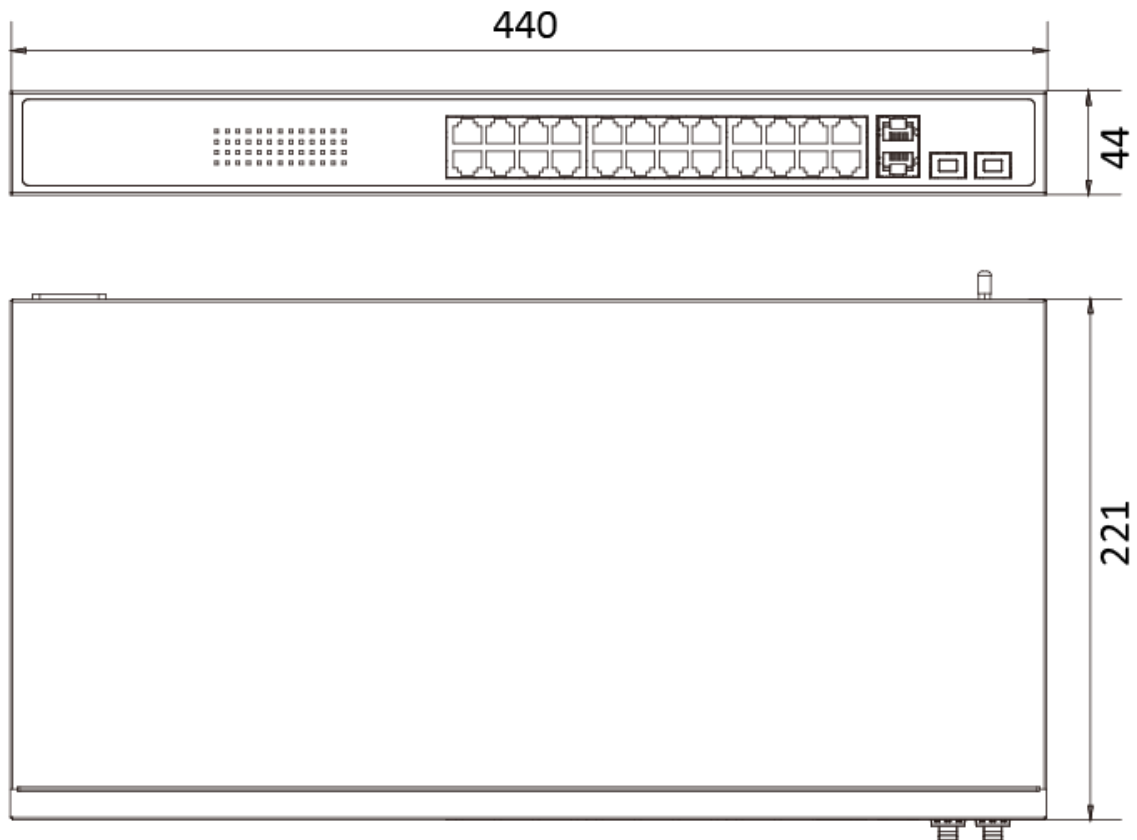

▪ **Accessory**

▪ **Optional**

|   |   |  |  |
|---|---|--|--|
| <b>HK-SFP-1.25G-20-1<br/>550<br/>SFP Module</b> | <b>HK-SFP-1.25G-20-1<br/>310<br/>SFP Module</b> | <b>HK-SFP-1.25G-1310<br/>-DF-MM<br/>SFP Module</b> | <b>HK-SFP-1.25G-20-1<br/>310-DF<br/>SFP Module</b> |
|---|---|--|--|



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq