


F/FTP Category 6A Cables

Content of Data Sheet				
Product model	UV-F/FTP6A-300-BC23AWG-DCA-R-O			
Product specification	Cat6A. F/FTP. 4x2x0.57mm CPR Dca			
Test Standard	ISO/IEC11801 ED.2 ANSI/TIA-568-C.2			
Conductor	Material	OFC		
	AWG	23		
	Nom.O.D.(mm)	0.57±0.005 mm		
	DC resistance	≤95Ω/km		
Insulation	Material	FPE		
	Thickness	0.21+0.03mm		
	Diameter	1.35±0.05 mm		
	Color	Blue/White- Blue	Green/White-Green	
		Orange /White-Orange	Brown/White-Brown	
Pitch	Twist Pitch	≤25mm		
	Cable Pitch	≤120mm		
Shield	Pair Screen	AL-Mylar 100% Coverage		
	Drain Wire	0.4± 0.01TC		
	Overall Shield	AL-Mylar 100% Coverage		
Sheath	Material	LSZH		
	Fire Resistance	CPR Dca		
	External O.D.	7.6±0.3 mm		
	Color	Orange		
	Tensile strength	>10 Mpa		
	Thickness	0.55±0.15 mm		
Surface Printing	Letter height	3.0±0.3 mm		
	Color	Black		

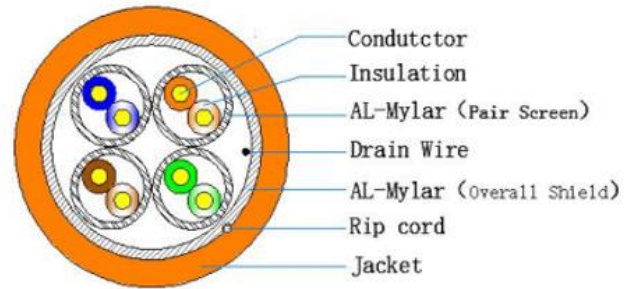

	Print error & Space	1±0.005 m
Packing	Packing	Reel
	Once packing dimension	400mm *200mm *240mm
length	305±1 m	
Rip-cord	Yes	
Ambient temperature	-20°C ~ 75°C	

Zhejiang Uniview Technologies Co.,Ltd.

No.369,Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, Zhejiang Province, China(310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2023 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.